




1) Sensing surface, 2) Potentiometer, 3) LED function indicator, 4) NO or NC selectable, 5) PNP or NPN selectable

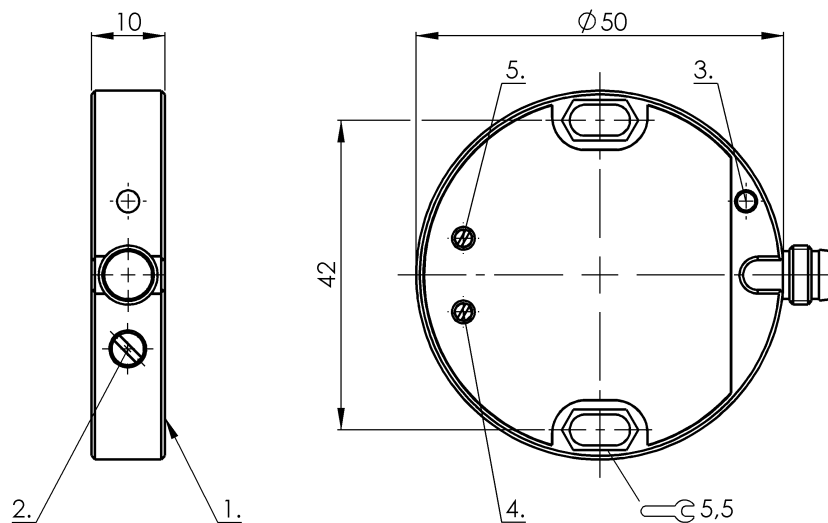

Basic features

Approval/Conformity	CE cULus WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Screwdriver Short guide
Sensitivity	Switching distance adjustable
Series	D50

Display/Operation

Function indicator	yes
--------------------	-----

Electrical connection

Connection	M8x1-Male, 3-pin
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

No-load current I_o max. at U_e	15 mA
Operating voltage U_b	10...30 VDC
Rated insulation voltage U_i	75 V DC
Rated operating current I_e	150 mA
Rated operating voltage U_e DC	24 V
Ripple max. (% of U_e)	10 %
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-30...60 °C
Contamination scale	1
Protection degree	IP65

Functional safety

MTTF (40 °C)	230 a
--------------	-------

Material

Cover material	POM
Housing material	POM
Material sensing surface	POM

Mechanical data

Dimension	Ø 50 x 10 mm
Installation	for flush mounting
Size	D50.0

Output/Interface

Switching output	PNP/NPN NO/NC programmable
------------------	----------------------------

Range/Distance

Measuring range	2...25 mm
-----------------	-----------


Remarks

For flush-mounting use only locking M8 connector

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

