
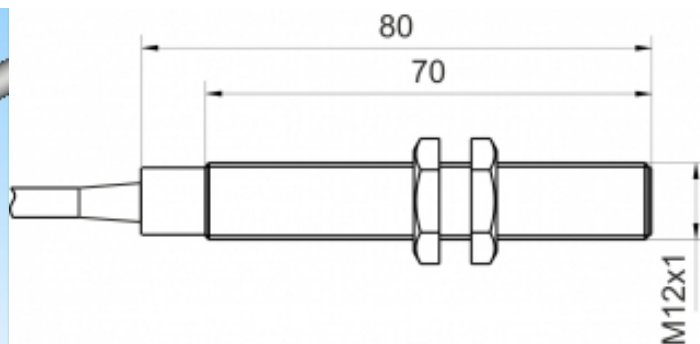


[Article Page](#)

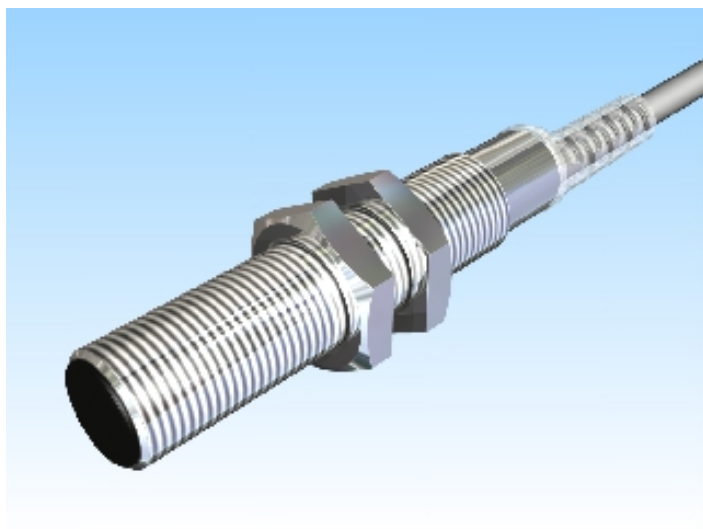

Name KJ2,5-M12MB80-ANU

Order number 08317140800

Matchcode 9914-0800

Switching distance 2,5 mm


Mounting  shielded

Switch type  analog

Signal Type Analog Voltage

Connection  Cable

Connection diagramm

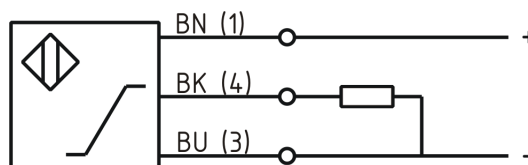

Dimension (in mm) fine-pitch thread M12 x 80

Special features Output Voltage 1 ... 9 V

Operating voltage 18 - 30 VDC

Max. ripple $\leq 5 \%$

No load current $\leq 10 \text{ mA}$

Switching frequency 100 Hz

Operating temperature -25°C to 70°C

Temperature drift $\pm 8 \%$

Repeat accuracy $\leq 1 \%$

Linearity	≤ 3 %
Time delay	300 ms
Resolution	4 V / mm
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PCB
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYCY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.14 mm ²
internal Load Resistor	